

POWERFULL AND VERSATILE

READY TO USE ANYWHERE

Compact articulated loaders are real workhorses in a lightweight compact format. These powerful and handy multi-purpose machines are wonderfully easy to operate and are suitable for a wide variety of applications.

① JOYSTICK
The multi-function electronic joystick enables easy and precise control of the loader boom and attachments. All controls are here, at your fingertips.



① CRUISE CONTROL
The MultiOne Cruise Control maintains a steady speed as set by the operator. Constant speed will give perfect results on the job site with a variety of attachments.



① DASHBOARD AND CONTROLS
Every component is considered by MultiOne, to maximise comfort and control. The cab layout is designed with attention to ergonomic principles, intuitive location of instruments and controls ensure the ease of use.

① UNBREAKABLE BODY PANELS
The resistance and flexibility of the compound used on the new body cover let the panel absorb shocks, deforms and go back to original shape.

① ENGINE
57 or 75 HP Kohler, compliant with Stage V, emission standards.

① RADIAL PISTON WHEEL MOTOR
The 4 Radial piston heavy duty and high efficiency wheel motors provide power with great control and reliability. Two speed available.

① TELESCOPIC BOOM
Only MultiOne has a double-H telescopic boom design, which gives extreme strength and symmetrical loading. Proven efficiency.



① WIDE CHOICE OF TYRES
Tires selectable according to the application.



① GREAT TRACTION
MultiOne loaders are equipped with four-wheel direct drive hydraulic motors and differential lock (DBS + Torque Divider) which guarantee maximum traction on all terrains. Rubber tracks available as option.

① 360° VISIBILITY
The 360° Operator Visibility is a well known MultiOne plus.

① MULTICONNECTOR + ACI
The Multiconnector lets you plug-in all hydraulic lines at once and drip free. ACI system allows the driver to control the attachments' movements without the need for separate control boxes, cables or additional wiring. The connection to the attachments is plug & play, reliable and easy.

① OVER 170 ATTACHMENTS
MultiOne has a decade-long experience of designing and implementing dedicated attachments. This know-how assures the best attachments for mini loaders are branded MultiOne.



① HIGH SPEED
MultiOne 11 series is equipped with a Double Speed Transmission system. The 4 Radial piston wheel motors provide a speed up to 35 km/h.



① LIFTING CAPACITY
The MultiOne loader can lift and handle heavy loads. You'll get excellent lifting capacity in a compact machine on any jobsite.

① COMFORT CAB
Heated seat, heating system and full glass cabin with weatherproof blue tinted glass, large door, side opening window. It's the optimal solution for driver protection from cold, wet and wind.



① SELF-LEVELLING BOOM
This system is installed on the machine boom and keeps the load level, without the need to continuously correct the position with the joystick.



① ONE DRIVE
OneDrive is a brand new transmission system. Its design dramatically reduces the power loss (-30%) by internal resistance of oil flow.



COMFORT

① COCKPIT AND DASHBOARD

MultiOne doesn't see comfort as a luxury. It's essential to the productivity. That's why every MultiOne loader is designed with the operator's experience in mind. Visibility, cab space, ease of control, air flow and ergonomics add up to focused work and satisfied operators.



① Multifunction Joystick

The Multifunction Joystick enables easy and precise control of the loader boom and attachments.



① Control panel

LCD graphic display with service intervals alerts. Handy switches to operate auxiliary functions.



① Seat

Ergonomic heated full adjustable suspension seat with armrests and seat belt.



CABIN



Stay comfortable in cold and wet weather with the optional full glass cabin with weatherproof blue tinted glass. The side window opens to provide fresh airflow across the operator, helping to provide more comfort. Strategically placed, louvered vents quickly defrost windows and direct heat to operator, providing excellent all-season versatility for winter months. The heated seat helps to keep your body warm and comfortable while working on frigid days.

Air conditioning system with electronic temperature control is available for warm climates.



① Heating System

New heating system even more efficient with 9 adjustable air vents.



① Side Window

The side window opens to ensure excellent ventilation of the cabin.



① A/C System

Air conditioning system with adjustable fan speed and electronic temperature control.



EASY MAINTENANCE

① EASY ACCESS TO FILTERS

When you rely on your equipment to complete your job, serviceability has to be easy – and it can't take up too much of your time. MultiOne always keeps easy serviceability in mind, ensuring that components are easy to reach and daily maintenance is quick to complete.

The easy-to-read, LCD graphic display provides operating information and machine warnings.

The high-capacity filter with visual indicator delivers clean airflow to your engine and excellent contaminant-holding capacity for long life and maximum component protection.



EASY TO TRANSPORT

① COMPACT AND LIGHT

MultiOne's compact size offers great maneuverability in narrow spaces. From a small indoor working area to an open field, MultiOne can reach places other machines can't. Despite its robust construction, the lightweight loader can be easily transported on a regular car trailer.

UNBREAKABLE BODY PANELS

The MultiOne body panels using a special compound that make them indestructibles.

The panels absorb shocks, deform and go back to original shape.

Other features of these panels are:

- UV protection.
- Wide temperature range resistance.
- Modern matt finishing surface.

All this guarantees a long life to the panels.




OPTIONS

Simply give your machine a personal touch or choose a function that you need. A wide selection of options to customize your compact articulated loader!

① AVAILABLE OPTIONS

- A/C system with heating
- Attachment coupling plate for rear mounting
- Automatic locking plate
- Auxiliary double front hydraulic outlets
- Auxiliary single rear hydraulic outlet
- Auxiliary double rear hydraulic outlet
- Auxiliary Working lights
- Backup warning beeper
- Beacon light
- Biodegradable oil
- Driver area cover
- Engine block heater
- Floating boom system
- Fully enclosed cab
- GPS kit
- Heating system
- Left protection bar
- Mirrors
- Rear 12 VDC outlet
- Rear bull bar
- Rear weights
- Rubber tracks kit
- Side weights
- Smart cabin
- Snow Chains
- Tie down bracket
- Trailer coupling
- Turf or skid tyres
- Warning & safety lights for road travel
- Wheel spacer

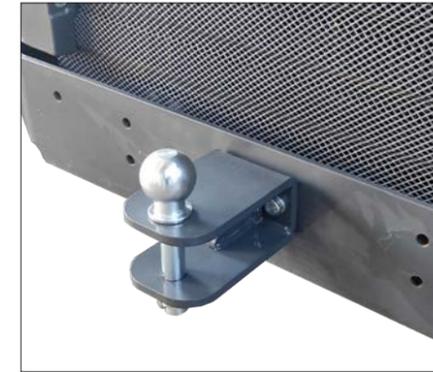

11.6 K



3,7 m

① PLUS

- High power and torque engine
- High speed
- High lifting height and capacity
- Multifunction Joystick + ACI
- One Drive (DBS+Cruise Control+Torque Divider)
- Self levelling telescopic boom
- High comfort:
 - Heated seat as standard
 - Smart cabin available
 - Full glass cabin available
 - Heating system available
 - A/C system available



① High Power Articulated Mini Loader.

MultiOne 11.6 K has all the new astonishing MultiOne features like OneDrive, Cruise Control, ACI and Unbreakable Body Panels, together with a top class lifting height and lifting capacity.

The MultiOne 11.6 K has been designed to be the first articulated compact loader to reach a lifting height of 3,7 m. This goal has been reached thanks to a new telescopic boom. The new boom and new rear weights allow the 11.6 k to show a lifting capacity up to 2,5 ton.

MAX LIFTING CAPACITY
2540 kg

ENGINE POWER
57 hp

SPEED
30 km/h

FLOW RATE
84 l/min

LIFT HEIGHT
3,7 m

WEIGHT
2320 kg

ACI ATTACHMENT CONTROL INTERFACE
CRUISE CONTROL




① HIGHLIGHTS

- **11.6 K STAGE V** - Kohler KDI1903TCR, 57 hp, 3 cyl., 1861 cc, Turbo common rail diesel engine with DPF, water cooled with electric start
- Stage V compliant engine
- One Drive (DBS+Torque divider+Cruise Control) available as option
- ETC - Electronic Throttle Control
- Unbreakable Body Panels
- Hydraulic oil cooler
- Two speed
- Hydraulically pilot operated variable displacement drive pump
- Hydraulic multiconnector
- Self-levelling double-H telescopic boom
- Hi-Flow system with 2 gear pumps
- ACI with Multi-functions joystick (22 functions)
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Radial piston high efficiency and heavy duty wheel motors
- 2 front working light
- Ergonomic full adjustable suspension heated seat with armrests and seat belt
- Self-locking multi-disk parking brake
- 380/55-17 wheels

① ENGINE STAGE V

The 11.6 K model is equipped with Stage V compliant engines. The Engine is a Kohler 57 HP with DPF that provide a high torque at low rpm (225 Nm @ 1500 rpm).

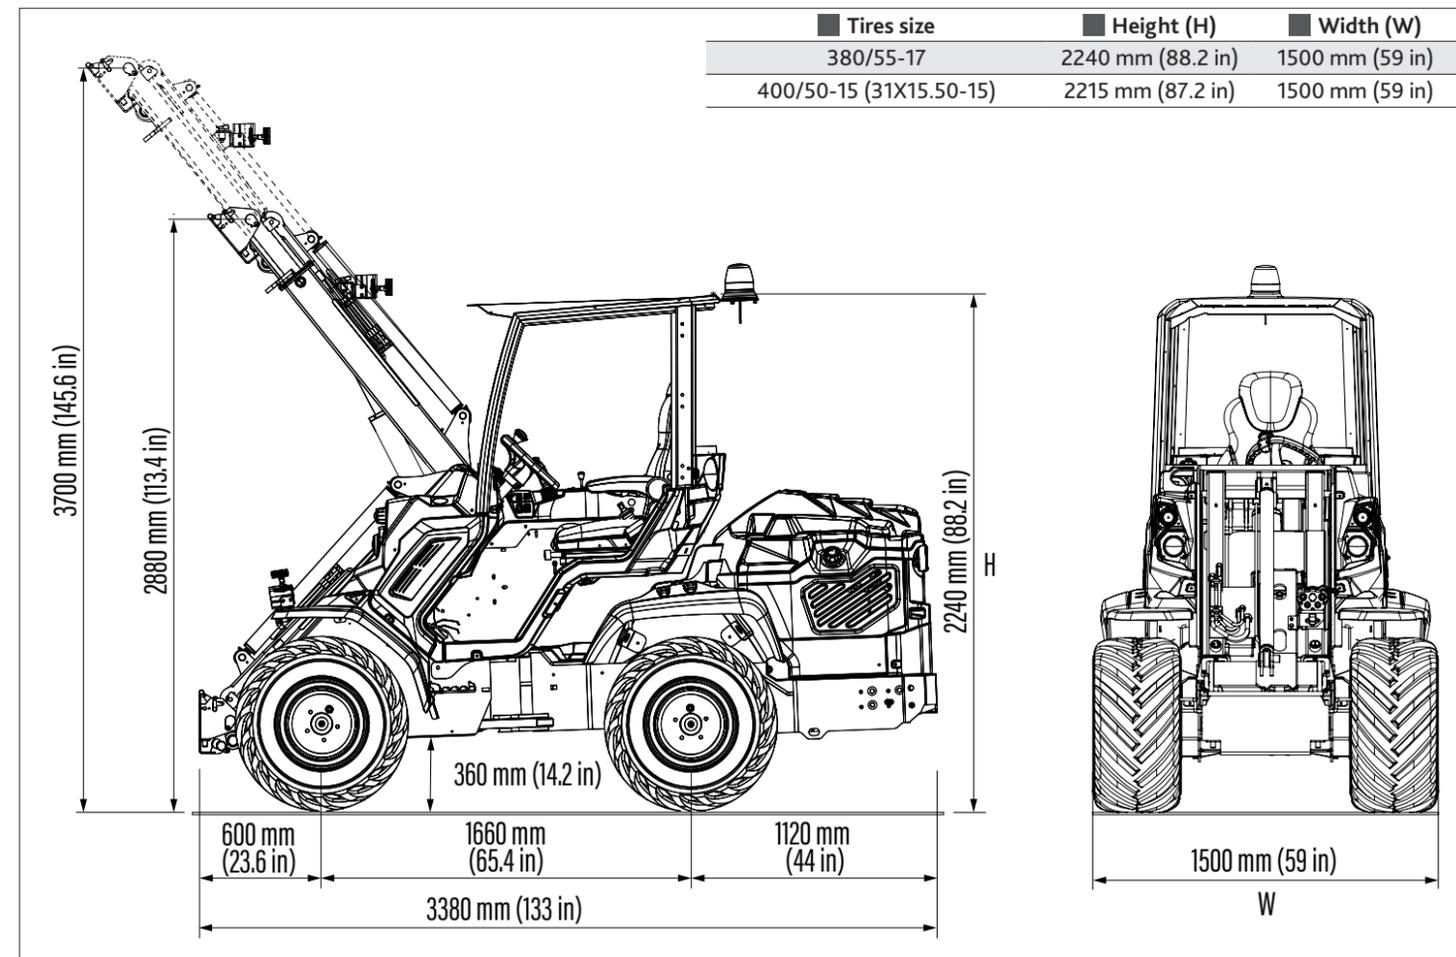

Model	11.6 K STAGE V
■ Engine	Kohler KDI 1903 - 3 cylinder - 1861 cc - Turbo common rail
■ Emission Standard	Stage V
■ Power (Iso Gross) / Torque	57 HP / 225 Nm @ 1500 rpm
■ Fuel	Diesel
■ Transmission	Hydrostatic OneDrive
■ Drive speed (max.) ⁽¹⁾	15 - 30 km/h (9.3 - 18.6 mph)
■ Aux. hydraulics oil flow	84 l/min (22.2 GPM)
■ Max. lifting height	3,7 m (145.6 in)
■ Tipping load, max. ⁽²⁾	3180 kg (7010 lbs)
■ Lifting capacity straight, max. ⁽³⁾	2540 kg (5600 lbs)
■ Breakout force / 50 cm (19.7 in)	3000 kg (6614 lbs)
■ Pushing force (c)	2650 kgf (2650 kp)
■ Average ground pressure (w/standard tires)	932 kg/m ² (192 lbs/sqft)
■ Turning radius: inside/outside	1135/2635 mm (44.7/103.7 in)
■ Standard tires (Tractor profile)	380/55-17
■ Weight	2320 kg (5115 lbs)

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

11.9 K



① PLUS

- High power and torque engine
- High speed
- High lifting height and capacity
- Multifunction Joystick + ACI
- One Drive (DBS+Cruise Control+Torque Divider)
- Self levelling telescopic boom
- High comfort:
 - Heated seat as standard
 - Smart cabin available
 - Full glass cabin available
 - Heating system available
 - A/C system available



① The biggest and strongest MultiOne.

The MultiOne 11.9 K is the new market benchmark, thanks to big equipment power and capabilities built into a compact chassis to work wherever you need.

A 75 hp, 4 cylinder, Turbo common rail engine grants outstanding performance in terms of oil flow to attachments, top speed and traction.

Moreover, the 11.9 K sets a new stand of high speed, tipping load, and lifting height. The MultiOne 11 series offers solutions that no one else can provide, with performances and capabilities far superior than those of any other loader.

It is imply the best-in-class multifunctional compact loader.

MAX LIFTING CAPACITY



2620 kg

ENGINE POWER



75 hp

SPEED



35 km/h

FLOW RATE



95 l/min

LIFT HEIGHT



3,7 m

WEIGHT



2400 kg

ACI ATTACHMENT CONTROL INTERFACE

CRUISE CONTROL




① HIGHLIGHTS

- **11.9 K STAGE V** - Kohler KDI2504TCR, 75 hp, 4 cyl., 2482 cc ,Turbo common rail diesel engine with DPF, Water cooled with electric start
- Stage V compliant engine
- One Drive (DBS+Torque divider+Cruise Control) available as option
- ETC - Electronic Throttle Control
- Unbreakable Body Panels
- Hydraulic oil cooler
- Two speed
- Hydraulically pilot operated variable displacement drive pump
- Hydraulic multiconnector
- Self-levelling double-H telescopic boom
- Hi-Flow system with 2 gear pumps
- ACI with Multi-functions joystick (22 functions)
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Radial piston high efficiency and heavy duty wheel motors
- 2 front working light
- Ergonomic full adjustable suspension seated heated seat with armrests and seat belt
- Self-locking multi-disk parking brake
- 380/55-17 wheels

① ENGINE STAGE V

The 11.9 K model is equipped with Stage V compliant engines. The Engine is a Kohler 75 HP with DPF that provide a high torque at low rpm (300 Nm @ 1500 rpm).

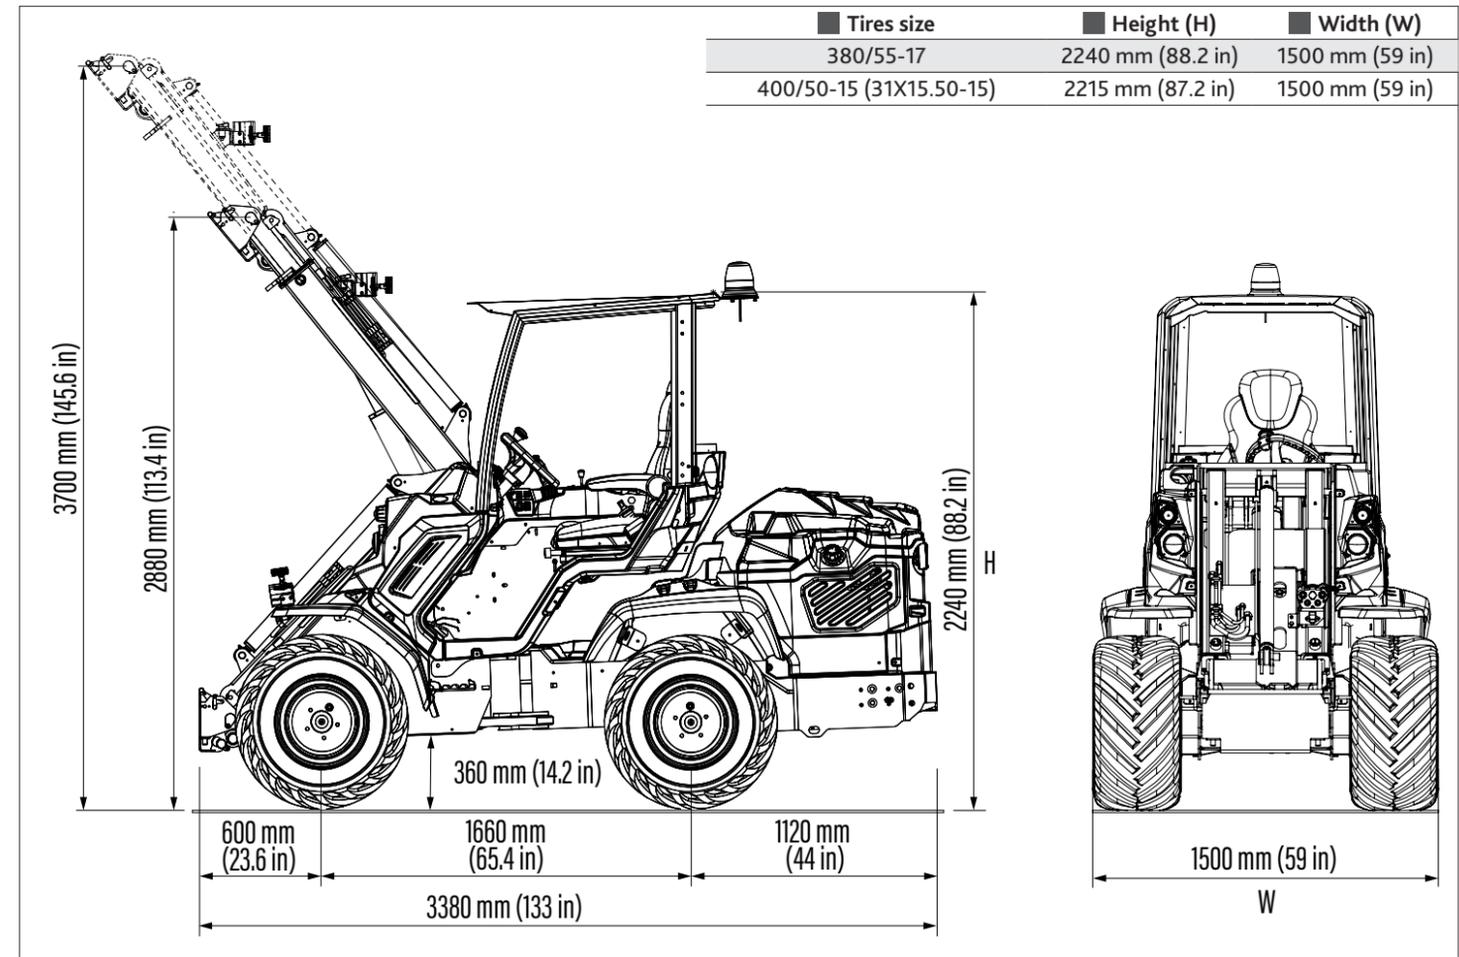

Model	11.9 K STAGE V
■ Engine	Kohler KDI 2504 - 4 cylinder - 2482 cc - Turbo common rail
■ Emission Standard	Stage V
■ Power (Iso Gross) / Torque	75 HP / 300 Nm @ 1500 rpm
■ Fuel	Diesel
■ Transmission	Hydrostatic OneDrive
■ Drive speed (max.) ⁽¹⁾	17 - 35 km/h (10.5 - 21.5 mph)
■ Aux. hydraulics oil flow	95 l/min (25 GPM)
■ Max. lifting height	3,7 m (145.6 in)
■ Tipping load, max. ⁽²⁾	3280 kg (7231 lbs)
■ Lifting capacity straight, max. ⁽³⁾	2620 kg (5776 lbs)
■ Breakout force / 50 cm (19.7 in)	3150 kg (6945 lbs)
■ Pushing force (c)	2650 kgf (2650 kp)
■ Average ground pressure (w/standard tires)	964 kg/m ² (197 lbs/sqft)
■ Turning radius: inside/outside	1135/2635 mm (44.7/103.7 in)
■ Standard tires (Tractor profile)	380/55-17
■ Weight	2400 kg (5291 lbs)

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.